



बड़ौदा यू.पी.बैंक
Baroda U.P. Bank

TENDER NOTICE

Baroda U.P. Bank, Regional Office Jaunpur, intends to invite Tenders from bonafide empanelled contractors for the proposed interior work of Shahganj Branch at Jaunpur, U.P. as per enclosed Offer Bid/BOQ proforma.

The completion period of work will be 30 days from the date of issue of order. The work shall be executed under the supervision of our consulting Architect and as per specifications demonstrated in Offer Bid proforma/BOQ.

Offer Bid proforma/BOQ is attached with this notice. Offer should be valid for a minimum period of - 120- days from the last date of submission. No brokerage shall be paid. The sealed covers marked as Bid superscribing "**FURNISHING WORK BID FOR SHAHGANJ BRANCH**" be put in one sealed cover/packet addressed and submitted to The Regional Manager, Baroda U.P. Bank, Regional Office- Jaunpur, Pawan plaza, civil line, Jaunpur, U.P.-222002 within 21 days from the day of publication of this advertisement/ on or before 07.07.2021 by 17.00 hrs.

Any decision taken by Bank at any point of time in connection with this process shall be final and conclusive and no claim or dispute from any quarter in that regard shall be entertained.

Date: 16.06.2021


Regional Manager

Attached: Offer Bid Proforma/BOQ

Schedule of Quantity Tender for furnishing work of Baroda U.P. Bank Shahganj New Branch Dist-Jaunpur

S.No.	Items of work	Qty	Unit	Rate	Amount.(Rs.)
1.	<p>Bank Low ht. Counter 2'-6'' Wide Made out of 19mm thick Board with drawer unit and Front side 12mm thick Etching Glass supported with teak Wood Or Aluminium member with 1.0mm thick Laminate on the top & drawer unit shall be Provided on one side while with space for CPU By its side. Pull out tray on slide shall be Provided on each counter for keeping keyboard. All the exposed edges shall have 6 mm th. TW Lapping duly polished. Inside surface shall be Enamel painted two coats over primer coats. It Shall be locks & handles etc. Provision for wire Management shall be made. Complete work as Per branch Manager/Architect Satisfaction.</p>	28.00	Rft.		
2.	<p>P/F of Bank Cash Counter in partition two level Cash counter 5'-0'' long (with 3'-10'' and 2'-6'' Height) counter for customer to be 1'-6'' wide And counter to be 3'-0'' wide with drawer unit Made out of 19mm thick board with 1.0mm thick Laminate on top and front and other internal Surface to be painted/Polished complete as per Item no. 1</p>	5'-0''	Rft.		

3. P/F of **Cash cabin partition** front-over the counter
Supported on 2'x1-1/2'' sal- wood frame work
Cover with 8.0 mm thk. Etching glass supported of
1'x1/2'' beading with book window in size 5'x6''
Center of the counter with 2'x2'' spacing aluminium
Grill will be fixed in front of
Partition side partition supported 2'x1-1/2'' sal
Wood well seasoned structure with a cost of anti
Termite treatment up to 3'-0'' height framing of
Inside area with 2'x1-1/2'' sal wood section
2'-0'' c/c horizontal and vertical with both side
6mm thick ply & 1.0mm thick laminates both side.
The upper portion up to 4'-0'' height shall be of
2-1/2'x2'x2-1/2'' Aluminum grill will be fixed
Complete with all accessories and labour. 169.00 Sft.
4. P/F of Low Ht. (4'-6'' High) partly glazed
Laminated portion in Branch Manager/R.D.O Cabin
The under framing shall be of 2'x2'' sal wood
(Anti termite Treatment) for under framing at
A max. Distance of 2' in each direction. 6mm th.
Waterproof ply shall be fixed on two side and
1mm the laminated shall be pasted over it with
Chemical adhesive. Provision shall be made for
Passage of electric / data cable and switch board.
T.W molding melamine polished shall be fixed
Wherever necessary. Bottom 4'' width shall
Have skirting upper 1'-6'' height shall have
5mm th. Plane glass. 287.00 Sft.

5. P/F of Low Ht. (4'-6'' High) Laminated portion
For **UPS Space** The under framing shall be of
2''x2'' sal wood (Anti termite Treatment) for
Under framing at a max. distance of 2' in each
Direction . 6mm th. Waterproof ply shall be
Fixed on two side and 1 mm the laminated shall
Be pasted over it with chemical adhesive. 128.0 Sft.
6. P/F Low ht. partition Wicket gate all
Specification as item No. 4. 52.00 Sft.
7. Providing and fixing in position double leaf
Powder coated **Aluminium entrance door**
Made of 14 guage thick sheet. All member
Shall be of 4''x1-3/4'' section and bottom
Rail shall be of 5''x1-3/4'' section with 6mm
Thick clear sheet glass including 4'' dia 2.0
Nos handles 10'' long 2.0 Nos, Tower bolts,
Floor spring 2.0 Nos lock etc. complete. 124.0 Sft.
8. P/F **Godrej Night latch.** 2.0 Nos.
9. P/F f **Godrej mortic lock** 2.0 No
10. P/F of **Door closer** I.S.I mark 4.0 No.
11. Providing and fixing **Writing desk** in
Position box type Wooden writing in public
Space of approximate size 4'-0'' x 2'-0''
Made out of 19mm thick good approved

	Quality ply with 6'' to 9'' wide pigeon hole Type compartments in the front façade boxing For keeping pay-in-ship, book literature etc. These writing table's must have laminates 1.0 mm thick on top writing desk and two side of the boxes. With beeding lipping, moulding and painting / polishing complete.	1.0	No.
12.	Suggestion Box	1.0	No.
13.	Check drop Box	1.0	No.
14.	Providing and fixing Aluminum grill in cash Cabin Grill size 2-1/2''x2''x2-1/2'' will be Fixed complete with all accessories & labour.	42.0	Sft.
15.	Providing and fixing in position Notice boards Of approximate size 3'-0'' x 2'-0'' and 6'' deep Made out of 19mm thick ply with fully glazed Shutter in front and soft board with felt cloth Lining at the back inclusive of good approved Quality lock to this shutter, hinges, fixtures, Handle etc. and front laminate/painted complete As directed by bank architect.	1.0	No.
16.	Providing and Fixing in position side units Made out of 19mm board with 1.0 mm Laminate with slidding hinged shutters (made out of 12mm thick ply with 1.0 mm Thick laminate on it) complete with handles Etc. Size 4'-0'' x 1'-6'' x 2'-6''	2.0	No.

17. Providing and fixing **Column/Wall paneling**
 Paneling all specification as per item no. 4 155.00 Sft.
18. Providing and fixing in position **Branch**
Manager Table (Size 6'-0'' x 3'-0'') made
 Out of 19mm thick water proof board with
 1.0 mm th. Laminated on all exposed surface
 (others external surface shall be painted with
 Two coats of enamel paint over one coat of
 Primer) It shall have one unit on one side while
 Provision to be made for pull out tray on slides.
 The table to be finished in TW/H.W Lipping &
 Godrej lock, handles footrest, latches all Complete. 1.0 No.
19. Providing and Fixing in position **Officer**
Table (Size 5'-0''x2'-6'')made out of 19mm.
 Thk. Water proof board with 1.0 mm. th.
 Laminated on all exposed surface (others external
 Surface shall be painted with two coats of enamel
 Paint over one coat of primer) It shall have one
 Unit on one side while. 1.0 No.
20. Providing & fixing wooden **Filling Cabinet**
 1'-6''deep to be fixed on the wall frame made out
 of 19mm thick commercial ply with siding
 hinge shutters made out of 12mm thick ply
 with 1.0mm laminate on the front & side other
 other internal surface to be painted as complete
 with handle, lock, wall catches etc. 109.00 sft
21. **Distemper on walls** surface's with oil bound
 Distemper two coats, with approved colour,
 Brand and manufacture of reqd. shade on under
 Coates wall surface to give an even shade over

And including a priming coat with cement primer of approved brand and manufacture such as berger, Shalimar, Asian, Nerolac distemper after the priming coat has been applied and perfectly dried. All holes, scratches if any shall Be required as mentioned in preparations of Surface and then first coat of distemper applied And allowed to Dry then second coat distemper Shall be applied. Work Completed up to the bank Satisfaction.

3944.00 Sft.

Total Rs.-----

(Rs. --- Lacs --- Thousand --- Only.)


For :

Date :--

Place :--

SPECIFICATION OF MATERIALS

S. No.	Item	Make/Specifications
1.	Ply board	Green, Century Ply, Archid, Sonear
2.	Pre Laminated Board	Novopan, KITLAM
3.	Laminate	Formica or, Century, Archid, Sunmica
4.	Aluminium Section	Hindalco / Jindal
5.	Door Closure	Hyper, Ritz, Everite (ISI marked)
6.	Glass	Modiguard, Saint Gobain
7.	Adhesive	Pidilite (Fevicol)
8.	Locks / Night Latch	Godrej
9.	Paint	Asian Paint, Nerolac
10.	Floor Spring	Hyper, Ritz, Everite (ISI Marked)

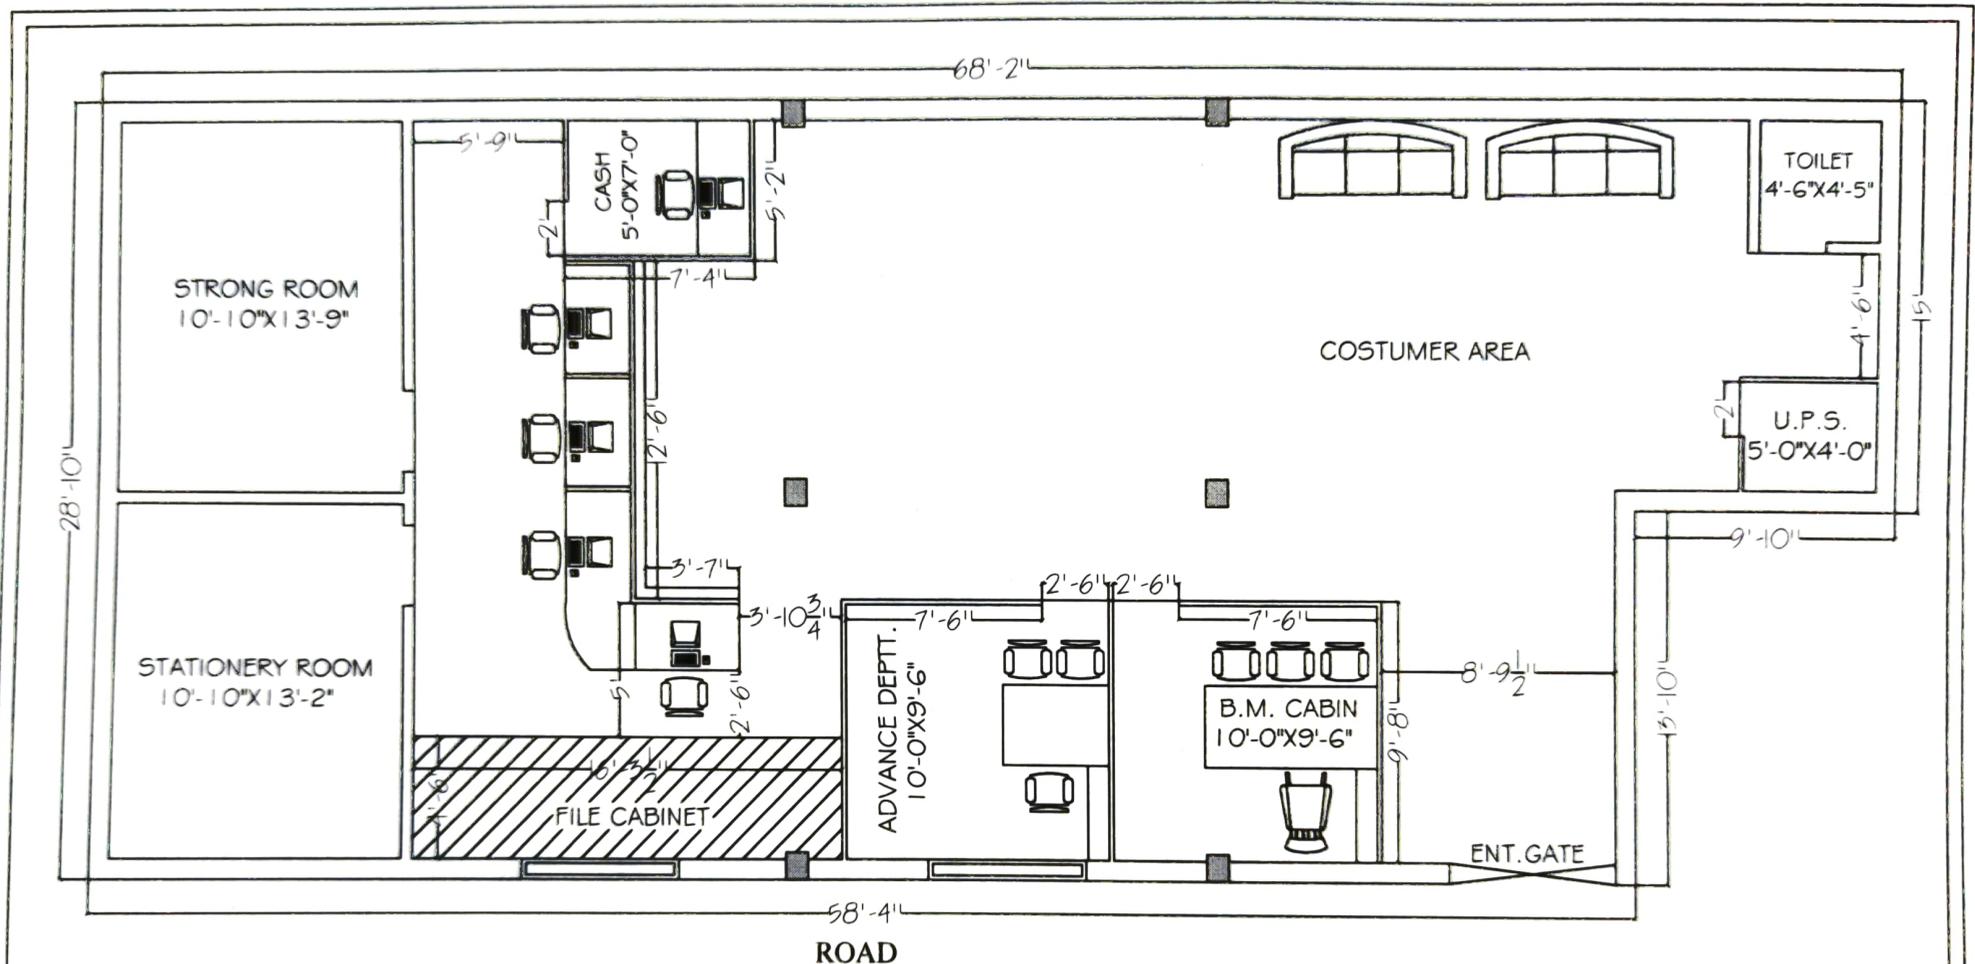

JOB TITLE	BARODA U.P. BANK SHAHGANJ BRANCH JAUNPUR	 OPTION-1	Ar. RAJESH KUMAR SINGH (B.Arch)  	VISION ARCH Shi.15/160-1k,Bharlai varanasi M.No.9450165944
OWNER				
DRAWN BY				
DRW. TITLE DATE	GR. FLOOR INTERIOR PLAN.			