



बड़ौदा यू.पी. बैंक
Baroda U.P. Bank

SHORT TERM TENDER NOTICE

(For Empanelled Furnishers & Interior Decorators only)

FURNISHING & INTERIOR DECORATION WITH CIVIL WORK IN
ADMINISTRATIVE OFFICE, GORAKHPUR ON SECOND FLOOR OF
BARODA U.P. BANK

IMPORTANT DATES

DATE OF ISSUE OF TENDER NOTICE	12.11.2021
LAST DATE AND TIME OF SUBMISSION OF TENDER	22.11.2021 up to 04:00 P.M.
DATE OF OPENING OF TENDER (FINANCIAL BID)	22.11.2021 at 04:30 P.M.

Baroda U.P. Bank
Premises & Equipment Department
Head Office
Buddh Vihar Commercial Scheme, Taramandal
Gorakhpur – 273016 (U.P.) (0551-2230010/ Mob : 07704007400)

General Manager

Date : 12.11.2021

NOTICE INVITING TENDER

Sealed item rate short term tenders are invited on behalf of the General Manager, Baroda U.P. Bank, from the Furnishers & Interior Decorators having valid Empanelment with the Baroda U.P. Bank for the work of FURNISHING & INTERIOR DECORATION WITH CIVIL WORK IN ADMINISTRATIVE OFFICE, GORAKHPUR ON SECOND FLOOR OF BARODA U.P. BANK, Administrative Office at Mohaddipur, Gorakhpur.

1. Issue of tender documents : 12/ 11/2021 to 22/11 /2021 up to 12.30 PM
2. Last date of receipt of tender documents : 22/11/2021 upto 4.00 PM
3. Date of opening of tender documents : 22/11/2021 at 4.30 PM
4. Place of submission & opening of tender : Baroda U.P. Bank, Head Office, Taramandal, Gorakhpur
5. Name of Architect : Ucee & Associates (Mob: 7571000869)
6. Period for completion of work from order date : Maximum 30 days
7. Retention percentage : 10% (Ten percent) from final bill
8. Defect liability period : 12 months from the date of completion certificate issued by the Bank Architect.
9. Release of retention money : After 14 days from defect liability period.

SUBMISSION OF TENDER

The tenders are to be submitted in a sealed envelope and clearly superscribed as

"Tender for FURNISHING & INTERIOR DECORATION WITH CIVIL WORK IN ADMINISTRATIVE OFFICE, GORAKHPUR ON SECOND FLOOR OF BARODA U.P. BANK, Administrative Office at Mohaddipur, Gorakhpur.

ENVELOPE TO BE CONTAINED

Envelope shall contain the priced Tender Volume

GENERAL INSTRUCTIONS TO TENDERERS

1. The term "Employers" or "Bank "shall mean "Baroda U.P. Bank ", or its authorized representatives at Baroda U.P. Bank, Head Office, Taramandal, Gorakhpur.
2. The term "Architect" shall mean "M/s.Ucee & Associates" who is the Architect Consultant to the Employer for this project & having office at "MADHAV KUNJ", MIG-169, RAPTI NAGAR PHASE-1, GORAKHPUR(U.P.) or its authorised representatives.
3. The term "Contractor" shall mean the successful tenderer to whom the Contract shall be awarded.
4. The "Works" shall mean the **"FURNISHING & INTERIOR DECORATION WITH CIVIL WORK IN ADMINISTRATIVE OFFICE, GORAKHPUR ON SECOND FLOOR OF BARODA U.P. BANK, Administrative Office at Mohaddipur, Gorakhpur."**
5. **The Contractor should quote the rates in figures and words. Any corrections or Over-writing should be initialed by the Contractor.**
6. The Contractor should submit the tenders with seal, signature and date on each Page.
7. The Contractors should submit the cost of the main items as per tender specifications. Further modification after awarding of the contract shall be not allowed unless there is specific instruction by the Bank/Architect to change specifications.
8. The contract is time-bound and the works are to be completed within the time limit specified in the notice inviting tenders. This is a working office and the contractor has to work with no or minimum obstruction to its regular services.
9. The decision of Employer and the Architect is final and binding.

TERMS & CONDITIONS

1. Unless otherwise mentioned, all works are with no allowance for Lapse waste. Unless otherwise described or measured separately, price for all the items shall include all necessary straight & curved edges.
2. Any damage to the work before the site is handed over, is to be replaced or made good at the expense of the contractor to the entire satisfaction of the Architect/Bank.
3. Income Tax, Other Tax as applicable shall be deducted at source as per the Income Tax Act / Rules.
4. The quantities indicated are subject to change. The payment of the bill shall be made as per the actual measurement as certified by the architect but not exceeding the total value quoted in the tender form.
5. The Architect or any officer of the Employers will be free to inspect the work at the site during the period of execution. Any suggestion of change or modification to improve the quality of work will be carried out subject to prior approval of the

competent authority of the employers and that of the Architect.

6. In case of failure to take up the work even after accepting the work order, or leaving the work incomplete, or for defective work not rectified, or violation of the terms and conditions, the contractor will be de-panelled/blacklisted.
7. For any item of work not covered or any unforeseen items of work, payment will be made according to the rates approved for similar nature of work, the costing done by the Architect, as per current PWD schedule of rates, or as per analysis of material cost, labour rate and profit to the Contractor at 10%. The Contractor must obtain prior approval in writing before undertaking such additional works.
8. The tenderers shall sign each & every page of the tender documents including the drawings attached here to.
9. The amount is to be quoted in figures as well as in words. In case the rates quoted in words and in figures are in variance, the amount written in words shall be taken as final.
10. The Contractor shall make their own arrangement at their own cost for storing materials, plants, tools etc. The employers will not be liable for security of the Contractor's materials.
11. No tools or plants will be issued by the bank.
12. The Employer / Architect reserves the right to accept or reject any tender without assigning any reason whatsoever and the said decision shall be final and binding upon the tenderer.
13. In case of breach of contract by the Contractor for slow progress of works or any other claim of damage, the Employer or the Architect may have the power to rescind the contract without furnishing further reasons thereof.
14. The Architect shall have the power to ask the contractor to furnish the sample/ color / test certificate from any Govt. / Authorized agent for any materials used/ to be used in the Works, the expenditure of which is to be borne by the Contractor.
15. The Employer shall be not be liable for any damages or compensation payable as a consequence of any accident or injury to any workman or other persons in the employment of the Contractor or any sub-contractor.
16. On completion of the Works, all rubbish, debris, materials, tools, Laborers, etc. to be removed by the contractor from the site and the contractor will hand over the site clean & clear & in usable condition within 3 days of completion of the works. Failing this, the employer may
17. Dispose the materials at the cost of the contractor.
18. In case of any dispute, the matter will be referred to the General Manager, Baroda U.P. Bank, Head Office Taramandal, Gorakhpur(UP).
19. Final Payment after completion of Project will be done with the certificate of Architect with deduction of retention money by the Bank.
20. The rates quoted in the tender shall exclude GST but include all excise tax, octroi & other taxes, no escalation of rates will be allowed under any circumstances.

ARCHITECT

AR. U. C. SRIVASTAVA
"MADHAV KUNJ", MIG-169,
RAPTI NAGAR PHASE-1,
GORAKHPUR, U.P.
MOBILE NO.- 7571000869

FINANCIAL QUOTES
(To be submitted in sealed envelope)

**FURNISHING & INTERIOR DECORATION WITH CIVIL WORK IN ADMINISTRATIVE OFFICE,
GORAKHPUR ON SECOND FLOOR OF BARODA U.P. BANK, Administrative Office at
Mohaddipur, Gorakhpur.**

Page 1 of 2

Excl. GST

S.No.	PARTICULAR OF WORK	QTY.	UNIT	RATE(Rs.)	TOTAL AMOUNT(Rs.)
1	Executive Table : Providing and fixing Executive table fabricated on site of 19mm thick commercial board with all expose, inner side 1mm thick mica finish, 3 Nos. of equal drawers on right side and cabinet with Godrej Lock and key on other side with arrangement of CPU and cable manager. Table top 12mm thick Plane Glass with edge finish and polish complete in all respect of size 8'-0"x4'-0"x2'-6"	425	SFT		
2	Back Side Cabinet: Providing and fixing Wooden cabinet back side unit fabricated 19mm thick commercial board all in front and outer side 1mm thick mica finish complete hardware and Godrej Lock. Size 5'-0"x2'-6"x1'-6"	720	SFT		
3	Side Table :Providing and fixing Side table fabricated 19mm thick commercial board inner and outer side 1mm thick mica finish complete hardware and Godrej Lock. Size 4'-0"x2'-6"x 1'-6"	10	Sft.		
4	Toilet Partition : Supply and fixing of Toilet Partition of ACP sheet make Alstone/Alstar thickness 3mm inside and wooden Paneling on outside with Aluminium frame complete in all respect. Section size 1.75" x 1.75" with single number of door with all fittings.	110	Sft		
5	One Piece Camod in Toilet: Toilet Kajaria made Camod and pedestal wash basin with tap, jet, spray, angle wall , towel hanger and soap case stand and all work like outer side piping , water supply in wall, tiles ht. 7'-0" and 1 mirror 3'-0" x2'-0" and floor tiles with drainage system complete work in all respect.	1	Job		
6	Frame Work on Walls: Providing and Fixing of frame work on Walls with Ply & 1mm Mica complete in all respect upto 7'-0" & 8'-6" height with 1 door of Size: 3'-6" x 7'-0" in which glass in centre as per design with all fitting after replacing old door shutter in same colour code. Provision of Split AC and all the electrical and computer/data point.	410.00	Sft		

Date :

Seal

Sign of Furnisher/Contractor

FINANCIAL QUOTES

(To be submitted in sealed envelope)

Page 2 of 2**Excl. GST**

S.No.	PARTICULAR OF WORK	QTY.	UNIT	RATE(Rs.)	TOTAL AMOUNT(Rs.)
7	False Ceiling : Providing and fixing, ARMSTRONG Make, false ceiling with provision of Cassette AC and Electrical fixture, using DUNE RH99 acoustical tiles of size 600 mm x 600 mm 15mm using SILHOUETTEMICROLOOK suspension system, consisting of*Main runner- with stitching *Cross Tee - stitching *Cross Tee -*Wall angle These members are Hot Dipped Galvanised steel. FRAME WORK.-Main runner spaced at 1200mm centre fixed to soffit by quick hanger-Hook(double hooks) at 1200mm distance. First and last hanger should not be at a distance more than 450mm from the adjacent wall.-1200mm cross Tee to be interlocked between main runners at 600mm centre From 1200x600 modules. 600mmx600mm module to be framed by fixing 600mm crosses Tee between centres of 1200mm cross Tee. Wall angle to be secured to wall at 450mm centres. Spot lights and other luminaries: never loathe tiles directly, Spot lights and other luminaries should be independently hung Or use 6mm Plywood of tile size of Patters on the back to transfer the load on to the grid system.	270.00	Sft		
8	Wooden Flooring: Providing and fixing of Wooden flooring of size 2"x6" over foam complete in all respect.	200.00	Sft		
9	Gents & Ladies Toilet With Wash Basin Area: a) Providing and fixing of Ladies toilet of Camod of 1 Pc. Of Kajaria with all fittings and a Pedestal Wash Basin with all the fittings with a mirror of size 3'-0"x 2'-0" complete in all respect. b) Providing and fixing of Gents toilet of Camod of 1 Pc. Of Kajaria with all fittings and refixing of Urinal Parts and a Pedestal Wash Basin with all the fittings with a mirror of size 3'-0"x 2'-0" complete in all respect. c) Providing and fixing of Kajaria Floor Tiles in both the Toilet and wash basin area. d) Providing and fixing of Kajaria wall Tiles upto 7' ht. in both the toilets and Basin area. e) Aluminium Partition with door as per Map to separate the ladies and gents toilet and a Aluminium Partition in gents toilet with door for WC as per map. f) OBD Painting on rest of the walls and ceiling g) Refixing of all the electrical points and fittings complete in all respect.	1	Job		
GRAND TOTAL AMOUNT(Rs.)					
GRAND TOTAL AMOUNT(Rs.) in words:					
Note : Amount to be quoted without GST					

Date :

Seal

Sign of Furnisher/Contractor

LIST OF APPROVED MATERIAL & MAKE

1. Board/Ply	: Century, Green.
2. Laminate	: Aica Sunmica, Century
3. Glass	: Tata Flot Glass, Modi, Asahi
4. Adhesive	: Fevicol, Jeevanjor
5. Lock / Night Latch	: Godrej, Link .
6. Fixture/Fitting	: Earl Bihari, Elibe
7. Wall Care Putty / P.O.P.	: Birla, J.K. Putty
8. Paint	: Asian, Nerolac, Berger
9. Floor Spring	: Goderj.
10. Copper Wire Frls Grade	: Finolex/Ploycab/Havell's/Hcl/Rr Kable
11. Modular Switch, Sockets	: Anchor Roma/Crabtree/Mk/Polycab
12. Data Cab	;; Digilink/ Finolex/Ploycab/Havell's/Hcl/Rr Kabel
13. Lugs	: Dowells/Jainson Or Equivalent
14. Metal Clad Socket	: Siemens/Mds Or Equivalent
15. Cement and other civil work material	: Reputed Brand

DATE: 12.11.2021

**(U.C.SRIVASTAVA)
PANEL ARCHITECT
BARODA U.P. BANK**

EUCEE & ASSOCIATES

FINANCIAL QUOTES FOR ELECTRICAL WIRING & A.C. WORK OF ADMINISTRATIVE OFFICER ON 2ND FLOOR OF BARODA UP BANK, GORAKHPUR

S.No.	Description of Items	Qty.	Unit	Rate	Amount
1-	Supply & Fixing of FP MCCB 250Amp 35ka with Enclosure near Energy Meter before Main Panel.	0	Set.		
2-	Main Panel Box: Fabrication Delivery & Installation in Cubical Type 20 gauge Metal sheet suitable for 415V with Digital Display Multifunctional Meter, "DANGER" Board, Current Transfermer and LED Indication Lamp comprising the following: Incoming: MCCB 200A 25ka FP- 1No. Copper Bus-Bar 200A- 1Set. Changeover Switch 200A- 1No & MCCB 165A 25ka FP for Gen.Supply. And Outgoing: Copper Bus-Bar 200A- 1Set. MCCB 100A 25ka FP- 1No & MCCB 63A 25ka FP- 1No.	0	No.		
3-	Supply & Fixing of TPN MCB DB 4way Double Door with 63Amp FP RCCB 300ma as Incommer and suitable load rating SPMCBs as per requirment for Light/Fan, UPS & AC.	0	No.		
4-	Supply & Fixing of SPN MCB DB 6way Double Door with 40Amp DP RCCB 300ma as Incommer and suitable load rating SPMCBs as per requirment for Light/Fan & AC.	1	No.		
5-	Supply & Drawing Circuit line by (2x6+1x2.5)Sq.mm FRLS PVC Insulated Copper Wire in PVC Pipe with Fitted Conciled or Open as per site instruction by Architect for Sub Mains Panel to TPN & UPS.	0	Mtr.		
6-	Supply & Drawing Circuit line by (2x4+1x2.5)Sq.mm FRLS PVC Insulated Copper Wire in PVC Pipe with All accessories fitted Conciled or Open as per site instruction by Architect for UPS, SPNDB & AC.	40	Mtr.		
7-	Supply & Drawing Circuit line by (2x2.5+1x1)Sq.mm FRLS PVC Insulated Copper Wire in PVC Pipe with All accessories fitted Conciled or Open as per site instruction by Architect for All Circuit wiring.	40	Mtr.		
8-	Supply & Drawing Circuit line by (2x1.5+1x1)Sq.mm FRLS PVC Insulated Copper Wire in PVC Pipe with All accessories fitted Conciled or Open as per site instruction by Architect for PC Circuit wiring.	50	Mtr.		
9-	Supply & Fixing 63Amp DP MCB with Enclosure for UPS Incoming and Outgoing.	0	No.		

Contd-2

S.No.	Discription of Items	Qty.	Unit	Rate	Amount
	B/F- Before Page---			Rs.	
10-	Light Fan Point Wiring by 1.5 Sq.mm Copper wire with all accessories like Switch, Socket, Top & Cover Plate as per Following---				
a-	Single Point controlled by Single Switch.	10	Point.		
b-	Double Point controlled by Single Switch.	2	Point.		
c-	Socket 6Amp Point controlled by Single Switch.	1	Point.		
d-	Call Bell controlled by Bel Push.	1	No.		
11-	Fan Point controlled by Electronic Regulator & Switch.	1	No.		
12-	Supply & Fixing for Raw Power 6/16Amp Socket with Switch.	1	No.		
13-	Supply & Fixing for PC Terminal Power Board 4way 6Amp Socket with Switch.	2	Set.		
14-	Supply & Fixing Air-conditioner Starter with 20Amp SPN MCB and Socket including Power Top.	1	No.		
15-	Earthing Work: Supply & Fixing Maintenance Free Electrode Earth with Backfil compound chemical Bag resistance shuld be less than 2.0 Ohms specification as per IS 3043/1987 complete in all respects.	0	Job.		
16-	Supply & Laying 10Sq.mm Copper Wire for Earthing Circuit Earth Place to UPS, Main Panel & all DBs.	0	Mtr.		
17-	Supply & Fixing Down Rod 2ft. Long for Ceiling Fan Hanging.	1	No.		
18-	Supply & Fixing Telephone single Pair wiring at Two Circuit.	0	Mtr.		
19-	Supply & Drawing LAN Cabling by CAT-6 in PVC Conduit Pipe.	40	Mtr.		
20-	Supply & Fixing RJ-11 Telephone Jack Panel complete in all respects.	0	No.		
21-	Supply & fixing Data Info-Rack 19" 9U complete in all respects.	0	No.		
22-	Supply & Fixing Networking Information Outlet Box (I.O. Box) complete in all respects.	2	No.		
23-	Supply & Fixing RJ-45 connector at LAN Cable one end complete in all respects.	2	No.		

Contd-3

S.No.	Description of Items	Qty.	Unit	Rate	Amount
	B/F- Before Page---			Rs.	
24-	Supply & Fixing Fast Ethernet Switch 24 Port as per Advice by Architect.	0 No.			
25-	Supply & Fixing Patch Cord (CAT-6) 1Yard.	1 No.			
26-	Supply & Fixing Patch Cord (CAT-6) 2Yard.	1 No.			
27-	Supply & Fixing LED Square Panel 2'x2' 36W.	1 No.			
28-	Supply & Fixing LED Round Panel 10Watts.	4 No.			
29-	Supply & Fixing LED Batten Fitting 18Watts.	1 No.			
30-	Supply & Fixing Wall Fan 400mm.	1 No.			
31-	Supply & Fixing Ceiling Fan 1200mm.	1 No.			
32-	Supply & Fixing Exhaust Fan 300mm.	1 No.			
Note : Amount to be quoted without GST		Total Rs.			


GRAND TOTAL AMOUNT(Rs.) in words:

List of Approved Make:-

Copper Wire FRLS Grade	: Finolex/ Polycab/ Havell's/ HCL/ RR Kable.
Electric Cable	: Havell's/ Polycab/ Gloster.
ELCB, MCCB & RCCB	: L&T/ Siemens/ GE/ Havell's/ ABB/ HPL/ Leagrand.
MCBs, DBs, SFUs	: L&T/ Siemens/ GE/ Havell's/ ABB/ HPL/ Leagrand.
Modular Switch, Sockets	: Anchor Roma/ Crabtree/ MK/ Polycab.
Earthing for Bldg. & UPS	: Earth Electrode IS:3043-1978 Chemical Earthing.
PVC Conduit Pipe	: AKG/ Precision/ Polycab/ Asian.
Telephone & Data Cable	: Digilink/ Finolex/ Polycab/ Havell's/ HCL/ RR Kable.
Lugs	: Dowells/ Jainson or Equivelents.
Metal Clad Sockets	: Siemens/ MDS or Equivelents.


Date: 11.11.2021

(U.C.SRIVASTAVA)
(Panel Architect)
BARODA UP BANK

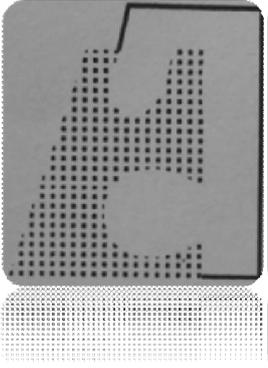

EUCÉE & ASSOCIATES

AR. U. C. SRIVASTAVA
"MADHAV KUNJ", MIG-169,
RAPTI NAGAR PHASE-1,
GORAKHPUR, U.P.
MOBILE NO.- 7571000869

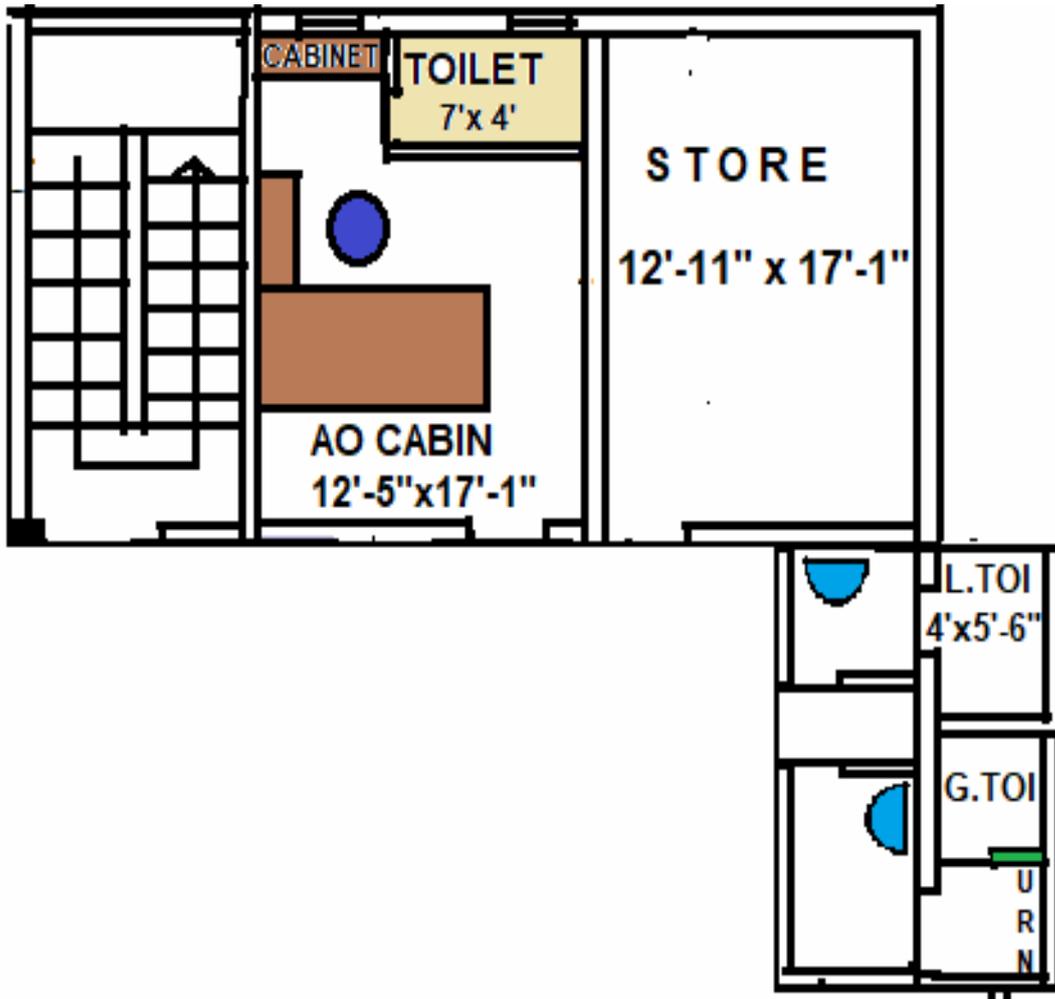

DATE: 12.11.2021

(U.C. SRIVASTAVA)
PANEL ARCHITECT
BARODA U.P. BANK